


GUMDISP504 Technical Data

Automatic Water Activated Tape Dispenser

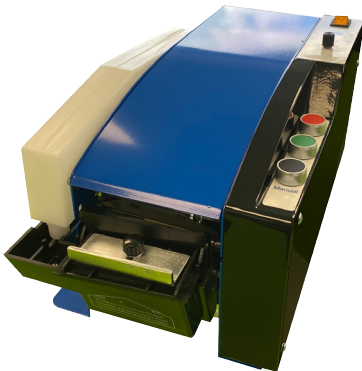

Description	Automatic Water Activated Tape Dispenser
Features/Benefits	Perfect for water activated tape Tape length button control Extended tape length is adjustable Economical Easy to use and portable
Areas of Use	Suitable for sealing small daily quantities of packaging
Applicable Industries	Transport/Shipping Packaging
Machine Size	500 x 270 x 260mm

Width of Tape	20-80mm
Max Tape Roll Outer Diameter	220mm
Net Weight	17.5kg
Voltage (V/Hz)	220/50, 110/60

The figures above are based off average results from multiple tests, results may vary + or - 5%

Pomona & Selfgard™ products are registered and under trademark of Pomona Group Ltd and sold exclusively through selected distributors.

For further information on Pomona or Selfgard™ please email sales@pomona.co.nz, phone **0800 POMONA (0800 766662)** or contact your distributor.

Conditions of Use

For best results apply self adhesive tapes between 15°C and 25°C in a dry environment. Application surfaces must be dry and free from dust and particles. Do not apply on surfaces treated or contaminated by anti-adhesives. Avoid contact with surfaces containing plasticizers or other chemical agents not compatible with the tape. In cases of rough or irregular surfaces, it is better to use a tape with a higher quantity of adhesive. Care must be taken with reference to removability without residue and working conditions of the self adhesive tape.

Tape Storage

Ideally store tape between 15°C and 25°C with a maximum relative humidity of 65%. Always store away from heat sources, avoiding exposure to light and if possible keep in the original packaging. When temperatures are lower than 15°C it is highly recommended to recondition the adhesive tape to normal temperatures (15°C to 25°C) before use.

Tape Shelf Life

Self-adhesive tapes technical features are generally not permanent but remain at their best for approximately 12 months, if stored according to suggested conditions and by avoiding extreme environmental conditions such as quick and sudden temperature changes, exposure to UV light and high levels of humidity.

All test methods are based on ASTM standards and Pomona's standardised test methods. The information provided above is based on our experience and tape industry knowledge. It is given in good will but is not intended as a guarantee or a warranty. All end users should ensure for themselves that the product is suitable for their own particular application before using. NB: Peak Force Test: based on ASTM 3759/D ASTM 3759/M and Pomona® test methods, Peel Test: based on ASTM D3330 and Pomona® test methods.

Pomona & Selfgard™ products are registered and under trademark of Pomona Group Ltd and sold exclusively through selected distributors.

For further information on **Pomona** or **Selfgard™** please email sales@pomona.co.nz, phone **0800 POMONA (0800 766662)** or contact your distributor.

Pomona Group Limited
POSTAL: PO Box 21806 | Henderson | Auckland 0650

AUCKLAND: 3 Hickory Avenue | Henderson | Auckland 0612
CHRISTCHURCH: 16 Brisbane Street | Sydenham | Christchurch 8023



100% NZ Owned and Operated

www.pomona.co.nz