


# S5933 Technical Data Sheet

Double Sided Butyl Tape



## Product Composition

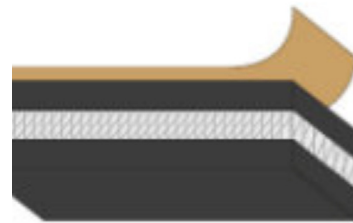

- Brown silicone paper
- Butyl Rubber
- Polyethylene net carrier
- Butyl Rubber

## Colours



Description	Double Sided Butyl Tape
Features/Benefits	Easy to use Acid, alkali and chemical resistant Butyl rubber is compatible with most surfaces Environmentally friendly
Areas of Use	Roofing and Cladding Heating & Ventilation Motorhome Manufacture Damp Proofing Marine Hatch Sealing General Sealing
Applicable Industries	Construction Marine Trade
Standard Sizes Available	12/18/24/36/48mm x 30m

Backing (Liner)	Brown Silicone Paper
Adhesive Type	Butyl Rubber
Maximum Tensile N/25mm	53 N/25
Elongation at Break %	25%
Adhesion to Stainless Steel N/25mm	1.5
Temperature Rating	70°C
Total Thickness (mm)	1.0mm (1000 Microns)

The figures above are based off average results from multiple tests, results may vary + or - 5%

Pomona & Selfgard™ products are registered and under trademark of Pomona Group Ltd and sold exclusively through selected distributors.

For further information on Pomona or Selfgard™ please email [sales@pomona.co.nz](mailto:sales@pomona.co.nz), phone 0800 POMONA (0800 766662) or contact your distributor.



## Conditions of Use

For best results apply self adhesive tapes between 15°C and 25°C in a dry environment. Application surfaces must be dry and free from dust and particles. Do not apply on surfaces treated or contaminated by anti-adhesives. Do not use paint containing additives which could reduce the adhesive properties. Avoid contact with surfaces containing plasticizers or other chemical agents not compatible with the tape. In cases of rough or irregular surfaces, it is better to use a tape with a higher quantity of adhesive. Care must be taken with reference to removability without residue and working conditions of the self adhesive tape.

## Tape Storage

Ideally store tape between 15°C and 25°C with a maximum relative humidity of 65%. Always store away from heat sources, avoiding exposure to light and if possible keep in the original packaging. When temperatures are lower than 15°C it is highly recommended to recondition the adhesive tape to normal temperatures (15°C to 25°C) before use.

## Tape Shelf Life

Self-adhesive tapes technical features are generally not permanent but remain at their best for approximately 12 months, if stored according to suggested conditions and by avoiding extreme environmental conditions such as quick and sudden temperature changes, exposure to UV light and high levels of humidity.

All test methods are based on ASTM standards and Pomona's standardised test methods. The information provided above is based on our experience and tape industry knowledge. It is given in good will but is not intended as a guarantee or a warranty. All end users should ensure for themselves that the product is suitable for their own particular application before using. NB: Peak Force Test: based on ASTM 3759/D ASTM 3759/M and Pomona® test methods, Peel Test: based on ASTM D3330 and Pomona® test methods.