


S624ECO Technical Data Sheet

Lope on a Roll



Colours

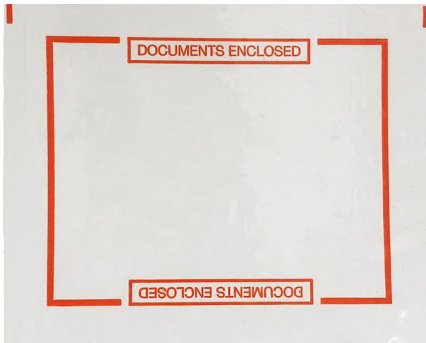

Description	Lope on a Roll Clear with a bold orange print of "Documents Enclosed"
Features/Benefits	Backing is made from biodegradable plant pulp material No release paper to discard Fits 3M's 824 Pouch Tape Dispenser High tack Adheres well to recycled cardboard Custom print available
Areas of Use	Shipping of goods
Applicable Industries	Packaging Courier
Standard Sizes Available	51m x 126mm x 153mm 333 Labels on a Roll
Adhesive Type	Natural Rubber
Maximum Tensile N/25mm	141
Elongation at Break %	138
Adhesion to Stainless Steel N/25mm	13 (Lope Edge) 1.7 (Lope Middle)
Total Thickness (mm)	0.068 (68 Microns)

The figures above are based off average results from multiple tests, results may vary + or - 5%

Pomona & Selfgard™ products are registered and under trademark of Pomona Group Ltd and sold exclusively through selected distributors.

For further information on Pomona or Selfgard™ please email sales@pomona.co.nz, phone 0800 POMONA (0800 766662) or contact your distributor.



Conditions of Use

For best results apply self adhesive tapes between 15°C and 25°C in a dry environment. Application surfaces must be dry and free from dust and particles. Do not apply on surfaces treated or contaminated by anti-adhesives. Do not use paint containing additives which could reduce the adhesive properties. Avoid contact with surfaces containing plasticizers or other chemical agents not compatible with the tape. In cases of rough or irregular surfaces, it is better to use a tape with a higher quantity of adhesive. Care must be taken with reference to removability without residue and working conditions of the self adhesive tape.

Tape Storage

Ideally store tape between 15°C and 25°C with a maximum relative humidity of 65%. Always store away from heat sources, avoiding exposure to light and if possible keep in the original packaging. When temperatures are lower than 15°C it is highly recommended to recondition the adhesive tape to normal temperatures (15°C to 25°C) before use.

Tape Shelf Life

Self-adhesive tapes technical features are generally not permanent but remain at their best for approximately 12 months, if stored according to suggested conditions and by avoiding extreme environmental conditions such as quick and sudden temperature changes, exposure to UV light and high levels of humidity.

All test methods are based on ASTM standards and Pomona's standardised test methods. The information provided above is based on our experience and tape industry knowledge. It is given in good will but is not intended as a guarantee or a warranty. All end users should ensure for themselves that the product is suitable for their own particular application before using. NB: Peak Force Test: based on ASTM 3759/D ASTM 3759/M and Pomona® test methods, Peel Test: based on ASTM D3330 and Pomona® test methods.