



GP04 Technical Data

Kraft Gum Paper Water Activated Tape

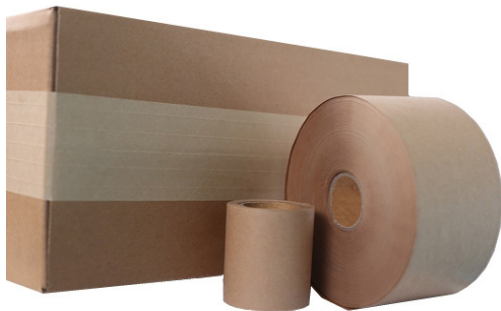

Product Composition

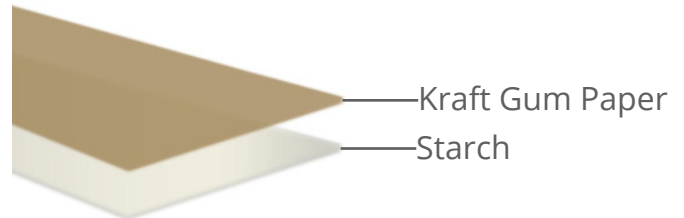

Colours



| | |
|---------------------------------|---|
| Description | Natural Virgin Kraft Gum Paper Tape with Water Activated Starch Adhesive |
| Features/Benefits | <ul style="list-style-type: none"> 100% recyclable Tamper evident, the tape cannot be removed without leaving traces of damage Strong adhesion as the tape bonds to the fibres of the carton Made from natural kraft paper Water activated |
| Areas of Use | <ul style="list-style-type: none"> Packaging Shipping of Goods |
| Applicable Industries | <ul style="list-style-type: none"> Transport/shipping Packaging |
| Standard Sizes Available | 70mm x 165m = 10 Rolls Per Carton |
| Slitting Options | Not Applicable |

| | |
|---|-------------------------------------|
| Backing (Liner) | Natural Plain Kraft Gum Paper Tape |
| Adhesive Type | Starch Adhesive 24 g/m ² |
| MD (Machine Direction) Maximum Tensile | 190 N/25mm (ASTM D-3652) |
| CD (Cross Direction) Maximum Tensile | 60 N/25mm (ASTM D-3759) |
| Temperature Resistance °C | 60 |
| Total Thickness (mm) | 0.11 (110 Microns) |

The figures above are based off average results from multiple tests, results may vary + or - 5%

Application Method

For the best results, apply water to the adhesive using Pomona's Cykop B6 Gum Paper Dispenser. To find out more about this dispenser email sales@pomona.co.nz or phone 0800 POMONA.

Conditions of Use

For best results apply self adhesive tapes between 15°C and 25°C in a dry environment. Application surfaces must be dry and free from dust and particles. Do not apply on surfaces treated or contaminated by anti-adhesives. Avoid contact with surfaces containing plasticizers or other chemical agents not compatible with the tape. In cases of rough or irregular surfaces, it is better to use a tape with a higher quantity of adhesive. Care must be taken with reference to removability without residue and working conditions of the self adhesive tape.

Tape Storage

Ideally store tape between 15°C and 25°C with a maximum relative humidity of 65%. Always store away from heat sources, avoiding exposure to light and if possible keep in the original packaging. When temperatures are lower than 15°C it is highly recommended to recondition the adhesive tape to normal temperatures (15°C to 25°C) before use.

Tape Shelf Life

Self-adhesive tapes technical features are generally not permanent but remain at their best for approximately 12 months, if stored according to suggested conditions and by avoiding extreme environmental conditions such as quick and sudden temperature changes, exposure to UV light and high levels of humidity.

All test methods are based on ASTM standards and Pomona's standardised test methods. The information provided above is based on our experience and tape industry knowledge. It is given in good will but is not intended as a guarantee or a warranty. All end users should ensure for themselves that the product is suitable for their own particular application before using.